


Fork Positioner T466

with independent sideshift - without
forks - for forks acc. to ISO 2330 - 2
hydraulic functions

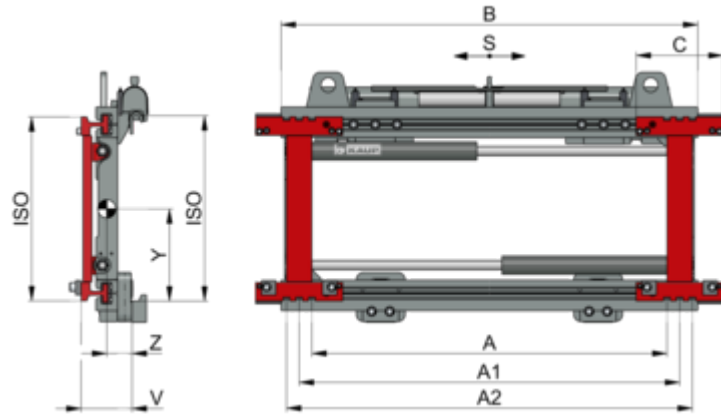

Specification:

The KAUP hook-on Fork Positioner T466 has been specially designed with optimised visibility and residual capacity. This attachment is manufactured from well proven components and is suitable for moderately heavy duty tasks. The qualities of the range of T466 Fork Positioners are particularly effective when different sizes of loads are regularly transported or different kinds of transportation are used - for example in logistics.



Attachment has separate sideshift as standard. The maximum allowable sideshift stroke (e.g. ± 100 mm) is always available independent of fork or arm position (with clamps or fork positioners).



Attachment is operated hydraulically, i.e. supplied with oil from the forklift truck's hydraulic system. Truck requires two additional hydraulic functions.



Attachment supplied serially without forks. All forks in accordance with ISO 2330 can be used. Matching forks model T180 are available.



Attachment can be fitted with load backrest model T479. The load backrest model T479.1 is suitable for fork positioners T160B and T466B up to 4.8T.



Attachment is available for operation in explosion hazardous areas.



Attachment is specially designed for the function fork positioning and is not suitable for clamping between the forks.

Technical specifications

Model														
2T466B	2.500	500	150-790	250-890	320-960	980	240	±100	120	2	138	55	244	141
2T466B	2.500	500	150-850	250-950	320-1.020	1.040	240	±100	120	2	138	56	242	145
2T466B	2.500	500	150-950	250-1.050	320-1.120	1.150	240	±100	120	2	138	57	240	152
2T466B	2.500	500	150-1.150	250-1.250	320-1.320	1.350	240	±100	120	2	138	57	238	164
2,5T466B	2.500	600	150-850	250-950	320-1.020	1.040	240	±100	120	2	153	65	226	174
2,5T466B	2.500	600	150-950	250-1.050	320-1.120	1.150	240	±100	120	2	153	66	225	182
3,5T466B	3.500	500	180-880	250-950	320-1.020	1.040	240	±100	130	3	153	62	283	190
3,5T466B	3.500	500	180-980	250-1.050	320-1.120	1.150	240	±100	130	3	153	63	282	198
3,5T466B	3.500	500	180-1.080	250-1.150	320-1.220	1.250	240	±100	130	3	153	63	281	206
3,5T466B	3.500	500	180-1.180	250-1.250	320-1.320	1.350	240	±100	130	3	153	64	280	213
3,5T466B	3.500	500	180-1.380	250-1.450	320-1.520	1.550	240	±100	130	3	153	64	278	228
3,5T466B	3.500	500	180-1.480	250-1.550	320-1.620	1.650	240	±100	130	3	153	65	277	236
4,8T466B ¹⁾	5.000	600	180-980	250-1.050	320-1.120	1.150	255	±100	150	3	153	68	277	243
4,8T466B ¹⁾	5.000	600	180-1.180	250-1.250	320-1.320	1.350	255	±100	150	3	153	69	275	262
4,8T466B ¹⁾	5.000	600	180-1.280	250-1.350	320-1.420	1.460	255	±100	150	3	153	69	274	273
4,8T466B ¹⁾	5.000	600	180-1.360	250-1.430	320-1.500	1.550	255	±100	150	3	153	69	274	282
4,8T466B ¹⁾	5.000	600	180-1.580	250-1.650	320-1.720	1.750	255	±100	150	3	163	75	270	337
4,8T466B ¹⁾	5.000	600	180-1.680	250-1.750	320-1.820	1.850	255	±100	150	3	163	75	269	350
6T466	6.000	600	260-1.060	350-1.150	440-1.240	1.350	330	±100	150	4	176	72	367	329

Model														
6T466	6.000	600	260-1.170	350-1.260	440-1.350	1.460	330	±100	150	4	176	72	366	340
6T466	6.000	600	260-1.360	350-1.450	440-1.540	1.650	330	±160	150	4	176	73	365	362
6T466	6.000	600	260-1.560	350-1.650	440-1.740	1.860	330	±160	150	4	176	73	362	389
8T466	8.000	600	260-1.560	350-1.650	440-1.740	1.860	330	±160	150	4	176	73	362	389
8T466	8.000	600	260-1.760	350-1.850	440-1.940	2.060	330	±160	150	4	176	73	360	409
8T466	8.000	600	260-1.960	350-2.050	440-2.140	2.260	330	±160	150	4	176	74	358	429
8T466	8.000	600	260-2.060	350-2.150	440-2.240	2.400	330	±160	150	4	176	74	357	440
10T466	8.000	1.100	260-1.760	360-1.860	460-1.960	2.060	370	±160	200	4	238	110	351	700
10T466	8.000	1.100	260-1.960	360-2.060	460-2.160	2.260	370	±160	200	4	238	110	350	725
10T466	8.000	1.100	260-2.060	360-2.160	460-2.260	2.400	370	±160	200	4	238	110	349	745



Qualities:

- For moderately heavy operation - complete program with capacities of up to 10 tons
- Very good residual capacity
- Excellent visibility
- Original forklift trucks useable
- Independent sideshift serially
- Construction width of the attachment and opening range is not dependent on the width of the forklift truck carriage



- 1) 4,8T with capacity (kg/mm) 2.700/1.200 available upon request.
- Not suitable for clamping between the forks.
- Load backrest see model T479 and T479.1
- Forks see model T180.

Product Images

