


Fork Positioner T466Z

with independent sideshift - 2 hydraulic functions

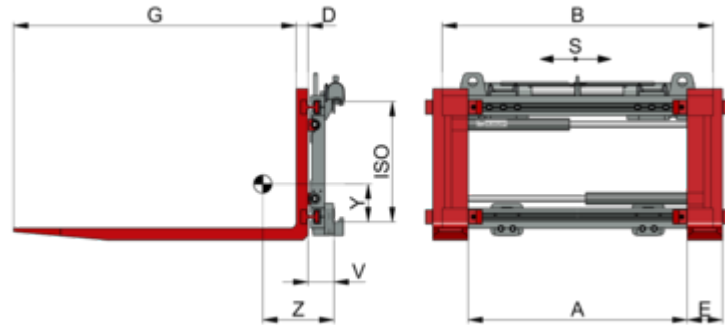

Specification:

The KAUP hook-on Fork Positioner T466Z(A) has been specially designed with optimised visibility and residual capacity. This attachment is manufactured from well proven components and is suitable for moderately heavy duty tasks. The qualities of the range of T466Z(A) Fork Positioners are particularly effective when different sizes of loads are regularly transported or different kinds of transportation are used - for example in logistics.



Attachment has separate sideshift as standard. The maximum allowable sideshift stroke (e.g. ± 100 mm) is always available independent of fork or arm position (with clamps or fork positioners).



Attachment is operated hydraulically, i.e. supplied with oil from the forklift truck's hydraulic system. Truck requires two additional hydraulic functions.



Attachment supplied serially without forks. All forks in accordance with ISO 2330 can be used. Matching forks model T180 are available.



Attachment can be fitted with load backrest model T479. The load backrest model T479.1 is suitable for fork positioners T160B and T466B up to 4.8T.



Attachment is available for operation in explosion hazardous areas.



Attachment is specially designed for the function fork positioning and is not suitable for clamping between the forks.



Fork Positioner T466Z

Technical specifications

Model													
1,5T466BZ	1.600	500	170-810	980	40	100	1.200	±100	2	113	251	151	237
1,5T466BZ	1.600	500	170-870	1.040	40	100	1.200	±100	2	113	248	152	240
1,5T466BZ	1.600	500	170-970	1.150	40	100	1.200	±100	2	113	243	153	246
2T466BZ	2.500	500	130-770	980	45	120	1.200	±100	2	113	292	135	271
2T466BZ	2.500	500	130-830	1.040	45	120	1.200	±100	2	113	287	136	274
2T466BZ	2.500	500	130-930	1.150	45	120	1.200	±100	2	113	282	138	280
2T466BZ	2.500	500	130-1.130	1.350	45	120	1.200	±100	2	113	274	140	292
2,5T466BZ	2.500	600	130-830	1.040	50	120	1.200	±100	2	128	279	138	320
2,5T466BZ	2.500	600	130-930	1.150	50	120	1.200	±100	2	128	274	139	328
3,5T466BZ	3.500	500	130-830	1.040	50	150	1.200	±100	3	123	293	166	372
3,5T466BZ	3.500	500	130-930	1.150	50	150	1.200	±100	3	123	288	168	380
3,5T466BZ	3.500	500	130-1.030	1.250	50	150	1.200	±100	3	123	284	170	388
3,5T466BZ	3.500	500	130-1.130	1.350	50	150	1.200	±100	3	123	280	171	395
3,5T466BZ	3.500	500	130-1.330	1.550	50	150	1.200	±100	3	123	272	174	409
3,5T466BZ	3.500	500	130-1.430	1.650	50	150	1.200	±100	3	123	268	176	416
4,5T466BZ	5.000	500	130-930	1.150	60	150	1.200	±100	3	126	285	170	450
4,5T466BZ	5.000	500	130-1.130	1.350	60	150	1.200	±100	3	126	275	173	468
4,5T466BZ	5.000	500	130-1.230	1.460	60	150	1.200	±100	3	126	270	175	479
4,5T466BZ	5.000	500	130-1.310	1.550	60	150	1.200	±100	3	126	267	176	488

Model													
4,5T466BZ	5.000	500	130-1.530	1.750	60	150	1.200	±100	3	136	243	187	536
4,5T466BZ	5.000	500	130-1.630	1.850	60	150	1.200	±100	3	136	238	190	549
4,8T466BZ ¹⁾	5.000	600	130-930	1.150	60	150	1.200	±100	3	126	285	170	450
4,8T466BZ ¹⁾	5.000	600	130-1.130	1.350	60	150	1.200	±100	3	126	275	173	468
4,8T466BZ ¹⁾	5.000	600	130-1.230	1.460	60	150	1.200	±100	3	126	270	175	479
4,8T466BZ ¹⁾	5.000	600	130-1.310	1.550	60	150	1.200	±100	3	126	267	176	488
4,8T466BZ ¹⁾	5.000	600	130-1.530	1.750	60	150	1.200	±100	3	136	243	187	536
4,8T466BZ ¹⁾	5.000	600	130-1.630	1.850	60	150	1.200	±100	3	136	238	190	549
6T466Z	6.000	600	200-1.110	1.350	70	150	1.200	±100	4	153	284	220	597
6T466Z	6.000	600	200-1.200	1.460	70	150	1.200	±100	4	153	280	222	610
6T466Z	6.000	600	200-1.400	1.650	70	150	1.200	±160	4	153	269	231	635
6T466Z	6.000	600	200-1.600	1.860	70	150	1.200	±160	4	153	261	234	662
8T466Z	8.000	600	200-1.600	1.860	70	150	1.200	±160	4	153	261	234	662
8T466Z	8.000	600	200-1.800	2.060	70	150	1.200	±160	4	153	256	237	682
8T466Z	8.000	600	200-2.000	2.260	70	150	1.200	±160	4	153	250	239	702
8T466Z	8.000	600	210-2.060	2.400	70	150	1.200	±160	4	153	248	240	713
10T466Z	8.000	900	160-1.790	2.060	70	200	1.200	±160	4	205	276	245	1.025
10T466Z	8.000	900	160-1.960	2.260	70	200	1.200	±160	4	205	272	247	1.050
10T466Z	8.000	900	160-2.060	2.400	70	200	1.200	±160	4	205	269	248	1.070
10T466Z	8.000	1.100	160-1.790	2.060	80	200	1.200	±160	4	205	286	240	1.075
10T466Z	8.000	1.100	160-1.960	2.260	80	200	1.200	±160	4	205	283	242	1.100
10T466Z	8.000	1.100	160-2.060	2.400	80	200	1.200	±160	4	205	280	243	1.120



Qualities:

- For moderately heavy operation - complete program with capacities of up to 10 tons
- Very good residual capacity
- Excellent visibility
- Supplied with welded forks
- Supplied optionally with screw on forks for wear intensive operation (A-version)
- Independent sideshift serially
- Construction width of the attachment and opening range is not dependent on the width of the forklift truck carriage



- 1) 4,8T with capacity (kg/mm) 2.700/1.200 available upon request.
- Not suitable for clamping between the forks.
- Load backrest see model T479 and T479.1
- with screw-on forks available upon request: ZA-Version

Product Images

