


Fork Positioner with Telescopic Forks T466B/T180CT

with independent sideshift - 2
hydraulic functions + solenoid valve

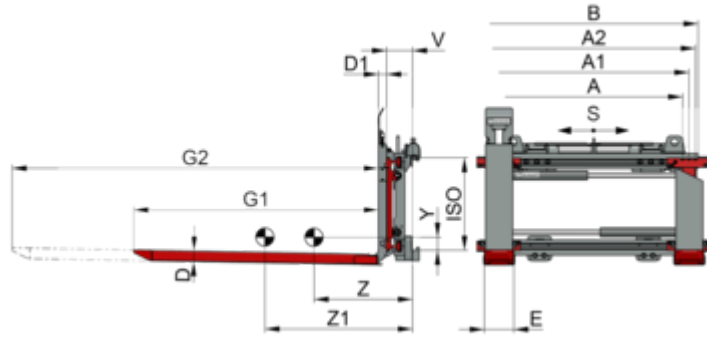

Specification:

KAUP Telescopic Forks can be easily combined with other attachments. The Fork Positioner with Telescopic Forks type T466/T180CT is one of these combinations. The forklift truck driver can adjust the distance between forks to suit the width of the load and, at the same time, handle loads to be lifted from or put down double deep.



Attachment requires more than two additional hydraulic functions in order to operate. In this case one of the hydraulic circuits is split by use of a solenoid valve which is part of the attachment.



Attachment has separate sideshift as standard. The maximum allowable sideshift stroke (e.g. ± 100 mm) is always available independent of fork or arm position (with clamps or fork positioners).



Attachment can be fitted with load backrest model T479. The load backrest model T479.1 is suitable for fork positioners T160B and T466B up to 4.8T.



Fork Positioner with Telescopic Forks T466B/T180CT

Technical specifications

Model																				
2T466B/2,5T180CT	2.020	600	850	1.450	180-880	250-950	320-1.020	1.040	163	57	45	1.200	2.050	100	2	138	339	429	142	344
2T466B/2,5T180CT	2.020	600	850	1.450	180-980	250-1.050	320-1.120	1.150	163	57	45	1.200	2.050	100	2	138	333	421	144	352
2T466B/2,5T180CT	2.020	600	850	1.450	180-1.180	250-1.250	320-1.320	1.350	163	57	45	1.200	2.050	100	2	138	323	408	148	365
2T466B/2,5T180CT.1	2.020	600	850	1.450	180-880	250-950	320-1.020	1.040	163	57	45	1.350	2.350	100	2	138	388	517	135	360
2T466B/2,5T180CT.1	2.020	600	850	1.450	180-980	250-1.050	320-1.120	1.150	163	57	45	1.350	2.350	100	2	138	381	507	137	368
2T466B/2,5T180CT.1	2.020	600	850	1.450	180-1.180	250-1.250	320-1.320	1.350	163	57	45	1.350	2.350	100	2	138	370	492	140	381
2,5T466B/2,5T180CT	2.500	600	1.030	1.450	180-880	250-950	320-1.020	1.040	163	57	45	1.200	2.050	100	2	153	329	412	142	373
2,5T466B/2,5T180CT	2.500	600	1.030	1.450	180-980	250-1.050	320-1.120	1.150	163	57	45	1.200	2.050	100	2	153	323	405	145	382
2,5T466B/2,5T180CT	2.500	600	1.030	1.450	180-1.180	250-1.250	320-1.320	1.350	163	57	45	1.200	2.050	100	2	153	314	392	148	398
2,5T466B/2,5T180CT.1	2.500	600	1.030	1.450	180-880	250-950	320-1.020	1.040	163	57	45	1.350	2.350	100	2	153	375	495	136	389
2,5T466B/2,5T180CT.1	2.500	600	1.030	1.450	180-980	250-1.050	320-1.120	1.150	163	57	45	1.350	2.350	100	2	153	369	485	138	398
2,5T466B/2,5T180CT.1	2.500	600	1.030	1.450	180-1.180	250-1.250	320-1.320	1.350	163	57	45	1.350	2.350	100	2	153	358	470	142	414
4,8T466B/3,5T180CT	3.500	600	1.600	1.450	180-980	250-1.050	320-1.120	1.150	163	58	45	1.200	2.050	100	3	153	289	374	197	464
4,8T466B/3,5T180CT	3.500	600	1.600	1.450	180-1.180	250-1.250	320-1.320	1.350	163	58	45	1.200	2.050	100	3	153	281	362	200	484
4,8T466B/3,5T180CT	3.500	600	1.600	1.450	180-1.360	250-1.430	320-1.500	1.550	163	58	45	1.200	2.050	100	3	153	272	350	203	505
4,8T466B/3,5T180CT.1	3.500	600	1.600	1.450	180-980	250-1.050	320-1.120	1.150	163	58	45	1.350	2.350	100	3	153	330	437	189	481
4,8T466B/3,5T180CT.1	3.500	600	1.600	1.450	180-1.180	250-1.250	320-1.320	1.350	163	58	45	1.350	2.350	100	3	153	320	423	192	501
4,8T466B/3,5T180CT.1	3.500	600	1.600	1.450	180-1.360	250-1.430	320-1.500	1.550	163	58	45	1.350	2.350	100	3	153	310	409	196	522

Model																				
4,8T466B/4,5T180CT	4.500	600	1.850	1.450	180-980	250-1.050	320-1.120	1.150	163	58	45	1.200	2.050	100	3	153	289	374	197	464
4,8T466B/4,5T180CT	4.500	600	1.850	1.450	180-1.180	250-1.250	320-1.320	1.350	163	58	45	1.200	2.050	100	3	153	281	362	200	484
4,8T466B/4,5T180CT	4.500	600	1.850	1.450	180-1.360	250-1.430	320-1.500	1.550	163	58	45	1.200	2.050	100	3	153	272	350	203	505
4,8T466B/4,5T180CT.1	4.500	600	1.850	1.450	180-980	250-1.050	320-1.120	1.150	163	58	45	1.350	2.350	100	3	153	330	437	189	481
4,8T466B/4,5T180CT.1	4.500	600	1.850	1.450	180-1.180	250-1.250	320-1.320	1.350	163	58	45	1.350	2.350	100	3	153	320	423	192	501
4,8T466B/4,5T180CT.1	4.500	600	1.850	1.450	180-1.360	250-1.430	320-1.500	1.550	163	58	45	1.350	2.350	100	3	153	310	409	196	522
4,8T466B/4,8T180CT	5.000	600	2.070	1.450	180-980	250-1.050	320-1.120	1.150	163	63	50	1.200	2.050	100	3	153	303	385	193	485
4,8T466B/4,8T180CT	5.000	600	2.070	1.450	180-1.180	250-1.250	320-1.320	1.350	163	63	50	1.200	2.050	100	3	153	294	373	196	505
4,8T466B/4,8T180CT	5.000	600	2.070	1.450	180-1.360	250-1.430	320-1.500	1.550	163	63	50	1.200	2.050	100	3	153	285	361	199	526
4,8T466B/4,8T180CT.1	5.000	600	2.070	1.450	180-980	250-1.050	320-1.120	1.150	163	63	50	1.350	2.350	100	3	153	345	450	185	504
4,8T466B/4,8T180CT.1	5.000	600	2.070	1.450	180-1.180	250-1.250	320-1.320	1.350	163	63	50	1.350	2.350	100	3	153	334	436	188	524
4,8T466B/4,8T180CT.1	5.000	600	2.070	1.450	180-1.360	250-1.430	320-1.500	1.550	163	63	50	1.350	2.350	100	3	153	324	421	191	545
6T466B/6T180CT	6.000	600	2.500	1.450	260-1.170	350-1.260	440-1.350	1.460	163	67	55	1.200	2.050	100	4	176	284	349	254	633
6T466B/6T180CT	6.000	600	2.500	1.450	260-1.360	350-1.450	440-1.540	1.650	163	67	55	1.200	2.050	160	4	176	277	339	258	656
6T466B/6T180CT.1	6.000	600	2.500	1.450	260-1.170	350-1.260	440-1.350	1.460	163	67	55	1.350	2.350	100	4A	176	321	404	244	653
6T466B/6T180CT.1	6.000	600	2.500	1.450	260-1.360	350-1.450	440-1.540	1.650	163	67	55	1.350	2.350	160	4A	176	313	393	248	676



Qualities:

- Very good residual capacity
- Good visibility conditions
- Independent sideshift serially
- Also available in integrated version
- Forks with hydraulic synchronism



- Incl. solenoid valve and accessory kit
- All models with parallel movement
- Load Backrest see model T479.1
- Telescopic forks with hardox wear bar see telescopic forks accessories.
- Load stop see accessories for telescopic forks.
- For triplex mast an electric spring cable drum is necessary. See accessories in the pricelist.

Product Images

