


Load Stabilizer T129ST

1 hydraulic function

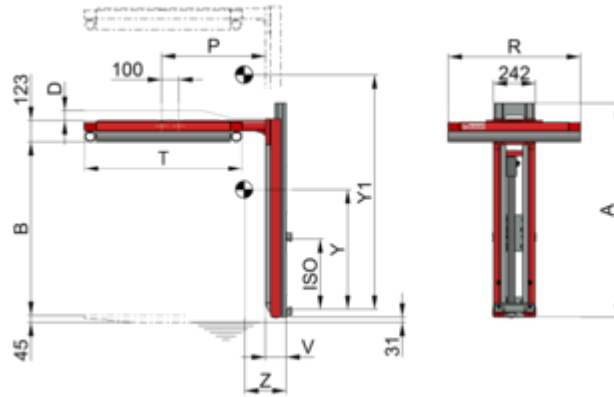

Specification:

The KAUP Load Stabilizer T129ST is mounted onto the fork carriage of the forklift truck and can be combined with other KAUP attachments.



Attachment is operated hydraulically, i.e. supplied with oil from the forklift truck's hydraulic system. Truck requires one additional hydraulic function.



Load Stabilizer T129ST

Technical specifications

Model													
1T129ST	1.240	960-1.970	80	605	800	1.000	3.700	3	122	251	702	1.362	165
1T129ST	1.240	960-1.970	80	605	800	1.000	3.700	2	122	251	702	1.362	165
1T129.1ST	1.240	960-1.770	10	605	800	1.000	3.700	3	122	256	690	1.217	162
1T129.1ST	1.240	960-1.770	10	605	800	1.000	3.700	2	122	256	690	1.217	162
1T129.2ST	920	760-1.350	10	605	800	1.000	3.700	3	122	283	562	964	144
1T129.2ST	920	760-1.350	10	605	800	1.000	3.700	2	122	283	562	964	144
1T129.3ST	1.495	960-2.170	280	605	800	1.000	3.700	3	122	234	754	1.525	181
1T129.3ST	1.495	960-2.170	280	605	800	1.000	3.700	2	122	234	754	1.525	181
1T129.4ST	1.240	1.070-2.080	10	605	800	1.000	3.700	3	122	250	741	1.404	167
1T129.4ST	1.240	1.070-2.080	10	605	800	1.000	3.700	2	122	250	741	1.404	167
1T129.5ST	1.495	1.200-2.210	10	605	800	1.000	3.700	3	122	236	827	1.472	179
1T129.5ST	1.495	1.200-2.210	10	605	800	1.000	3.700	2	122	236	827	1.472	179



Qualities:

- Solid construction
- Good visibility conditions
- Good residual capacity



- The total height is the result of adding fig. B + D + 123 mm + 45 mm.
- To choose the right fork length please consider dimension „V“.
- The standard contact pad frame is alternatively available in 770 x 920 mm or 800 x 1.000 mm.
- Increased contact pad on request.

Product Images

