


## Load Stabilizer T155ST

Optimized for maximum residual capacity by carriages beside the frame - 2 hydraulic functions

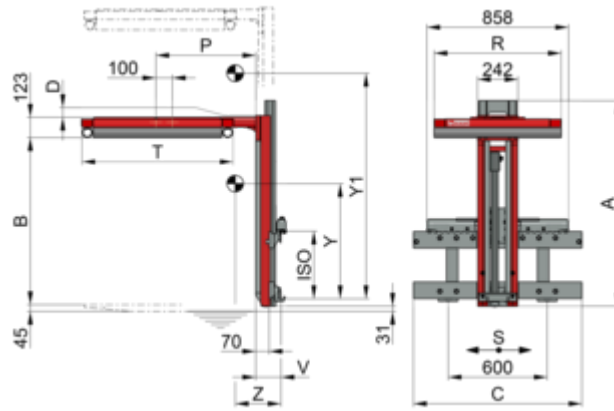

### Specification:

The KAUP Stabilizer with optimised residual capacity has a contact pad frame mounted directly into the fork carriage of the attachment and therefore achieves a low lost load centre. The sideshift stroke allows the driver to compensate inaccuracies.



Attachment is operated hydraulically, i.e. supplied with oil from the forklift truck's hydraulic system. Truck requires two additional hydraulic functions.



Attachment has separate sideshift as standard. The maximum allowable sideshift stroke (e.g.  $\pm 100$  mm) is always available independent of fork or arm position (with clamps or fork positioners).



Attachment supplied serially without forks. All forks in accordance with ISO 2330 can be used. Matching forks model T180 are available.



# Load Stabilizer T155ST

## Technical specifications

| Model     |       |     |       |             |     |     |     |     |       |       |   |      |    |     |     |       |     |
|-----------|-------|-----|-------|-------------|-----|-----|-----|-----|-------|-------|---|------|----|-----|-----|-------|-----|
| 1T155ST   | 2.500 | 500 | 1.240 | 960-1.970   | 890 | 80  | 605 | 800 | 1.000 | 3.700 | 2 | ±100 | 82 | 208 | 577 | 1.041 | 236 |
| 1T155.1ST | 2.500 | 500 | 1.240 | 960-1.770   | 890 | 10  | 605 | 800 | 1.000 | 3.700 | 2 | ±100 | 82 | 210 | 567 | 935   | 232 |
| 1T155.2ST | 2.500 | 500 | 920   | 760-1.350   | 890 | 10  | 605 | 800 | 1.000 | 3.700 | 2 | ±100 | 82 | 221 | 470 | 740   | 214 |
| 1T155.3ST | 2.500 | 500 | 1.495 | 960-2.170   | 890 | 280 | 605 | 800 | 1.000 | 3.700 | 2 | ±100 | 82 | 200 | 623 | 1.178 | 251 |
| 1T155.4ST | 2.500 | 500 | 1.240 | 1.070-2.080 | 890 | 10  | 605 | 800 | 1.000 | 3.700 | 2 | ±100 | 82 | 207 | 606 | 1.072 | 237 |
| 1T155.5ST | 2.500 | 500 | 1.495 | 1.200-2.210 | 890 | 10  | 605 | 800 | 1.000 | 3.700 | 2 | ±100 | 82 | 201 | 674 | 1.138 | 250 |



## Qualities:

- Solid construction
- Good visibility conditions
- Good residual capacity
- Independent sideshift serially



- The standard contact pad frame is alternatively available in 770 x 920 mm or 800 x 1.000 mm.
- To choose the right fork length please consider 70 mm overhang (see drawing).
- Increased contact pad on request.
- Increased fork carriage widths available upon request.

## Product Images

