


Rotating Roll Clamp T458B

360° rotation continuous - short arm
hydraulically adjustable in any turning
position - 2 hydraulic functions

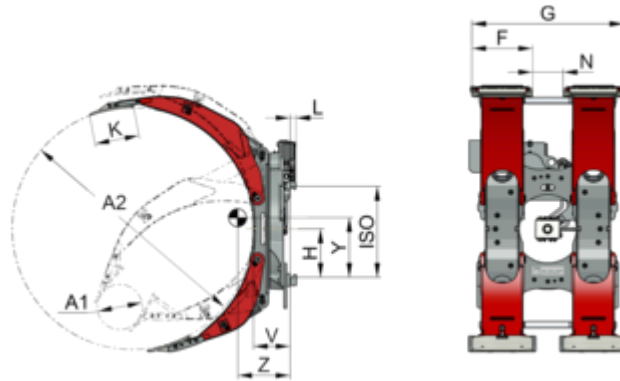

Specification:

With the new view-optimised designed KAUP Rotating Roll Clamp T458B roles and pipes can be taken up and transported carefully. This makes this attachment indispensable wherever you are dealing with the handling of paper rolls, concrete pipes and other similar items.



Attachment rotates hydraulically by 360° endless in both directions.



Attachment is operated hydraulically, i.e. supplied with oil from the forklift truck's hydraulic system. Truck requires two additional hydraulic functions.



Attachment is serially designed without sideshift. It can be fitted with separate or valveblock sidesift upon request.



Attachment can be fitted with different types of contact pad surfaces specifically suited to the application.



Attachment is available restricted to 180° rotation.



Rotating Roll Clamp T458B

Technical specifications

Model																
1T458B	1.200	675	200-1.350	300	700	211	250	31	100	3.760	4,8	2	195	301	297	421
1T458B	1.100	725	200-1.450	300	700	211	250	31	100	3.760	4,8	2	195	279	300	426
1,5T458B	1.550	675	200-1.350	300	700	211	250	31	100	3.760	4,8	2	195	301	298	424
1,5T458B	1.500	725	200-1.450	300	700	211	250	31	100	3.760	4,8	2	195	313	305	429
2T458B	2.400	675	200-1.350	340	850	270	250	31	170	4.810	6,1	2	203	341	275	547
2T458B	2.200	725	200-1.450	340	850	270	250	31	170	4.810	6,1	2	203	344	282	557
2T458B	2.050	750	200-1.500	340	850	270	250	31	170	4.810	6,1	2	203	352	287	563
2T458B	2.000	800	200-1.600	340	850	270	250	31	170	4.810	6,1	2	203	354	297	586
2T458B	1.750	915	200-1.830	340	850	270	250	31	170	4.810	6,1	2	203	358	321	609
2T458B	2.400	675	200-1.350	340	850	272	250	32	170	4.810	6,1	3	203	354	271	557
2T458B	2.200	725	200-1.450	340	850	272	250	32	170	4.810	6,1	3	203	357	278	567
2T458B	2.050	750	200-1.500	340	850	272	250	32	170	4.810	6,1	3	203	364	283	573
2T458B	2.000	800	200-1.600	340	850	272	250	32	170	4.810	6,1	3	203	366	293	596
2T458B	1.750	915	200-1.830	340	850	272	250	32	170	4.810	6,1	3	203	369	317	619
3T458B	3.200	675	200-1.350	340	850	338	250	34	170	5.590	7,1	3	207	245	419	677
3T458B	3.100	725	200-1.450	340	850	338	250	34	170	5.590	7,1	3	207	255	430	700
3T458B	2.800	800	220-1.600	340	850	338	250	34	170	5.590	7,1	3	207	269	430	722
3T458B	2.500	915	200-1.830	340	850	338	250	34	170	5.590	7,1	3	207	291	428	760
3T458B	2.100	1.100	550-2.200	340	850	338	250	34	170	5.590	7,1	3	207	326	444	800

Model																
4T458B	4.200	675	220-1.350	420	1.000	384	300	41	160	8.800	10,3	3	268	311	468	1.046
4T458B	3.900	725	220-1.450	420	1.000	384	300	41	160	8.800	10,3	3	268	313	471	1.038
4T458B	3.500	800	250-1.600	420	1.000	384	300	41	160	8.800	10,3	3	268	328	473	1.070
4T458B	3.400	915	300-1.830	420	1.000	384	300	41	160	8.800	10,3	3	268	352	472	1.136
4T458B	2.800	1.100	600-2.200	420	1.000	384	300	41	160	8.800	10,3	3	268	392	481	1.206
4T458B	4.200	675	220-1.350	420	1.000	350	300	43	160	8.800	10,3	4	266	305	450	1.065
4T458B	3.900	725	220-1.450	420	1.000	350	300	43	160	8.800	10,3	4	266	307	453	1.057
4T458B	3.500	800	250-1.600	420	1.000	350	300	43	160	8.800	10,3	4	266	322	455	1.089
4T458B	3.400	915	300-1.830	420	1.000	350	300	43	160	8.800	10,3	4	266	346	455	1.155
4T458B	2.800	1.100	600-2.200	420	1.000	350	300	43	160	8.800	10,3	4	266	386	465	1.225
5T458B	4.750	800	250-1.600	420	1.000	350	300	46	160	10.560	12,9	4	318	366	425	1.183
5T458B	4.200	915	320-1.830	420	1.000	350	300	46	160	10.560	12,9	4	318	388	428	1.245
5T458B	3.900	1.000	400-2.000	420	1.000	350	300	46	160	10.560	12,9	4	318	405	432	1.276
6T458B	5.900	800	270-1.600	420	1.000	350	300	45	160	17.590	20,7	4	318	351	428	1.351
6T458B	4.600	1.100	600-2.200	420	1.000	350	300	45	160	17.590	20,7	4	318	407	438	1.490



Qualities:

- Very good visibility conditions
- Favourable lost load and weight
- Solid, slender arm construction
- Different contact pad coatings available
- Rotation 360° endlessly
- Limitation on rotation 180° optionally
- Service friendly



- Optional: contact pad coatings (standard polyurethane coating Poly-1).
- Capacity related to max. roll diameter.
- Optional: The short arm can be hydraulically adjusted at a rotation angle of 45°.
- Optional: restricted to 180° rotation, continuous contact pads.
- For taking up horizontal rolls, 5-degree mast forward tilt is required.
- Pressure plate coverings see under accessories.
- Attachment with sideshift Model T498B (add-on price).

Product Images

