


Rotating Roll Clamp T458BC

360° rotation continuous - short arm
fixed - 2 hydraulic functions

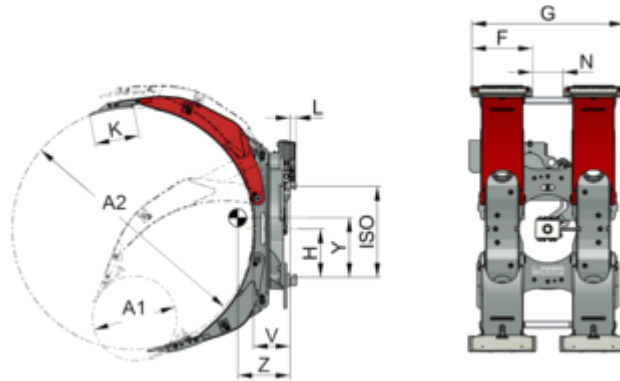

Specification:

With the view-optimised designed KAUP Rotating Roll Clamp T458BC all kinds of roles can be taken up carefully and be advanced. This makes this attachment everywhere invaluable where the Handling of paper rolls, concrete tubes and similar one is essential.



Attachment rotates hydraulically by 360° endless in both directions.



Attachment is operated hydraulically, i.e. supplied with oil from the forklift truck's hydraulic system. Truck requires two additional hydraulic functions.



Attachment is serially designed without sideshift. It can be fitted with separate or valveblock sideshift upon request.



Attachment can be fitted with different types of contact pad surfaces specifically suited to the application.



Attachment is available restricted to 180° rotation.



Rotating Roll Clamp T458BC

Technical specifications

Model																
1T458BC	1.200	675	440-1.350	300	700	211	250	31	100	3.760	4,8	2	195	302	301	417
1,5T458BC	1.550	675	440-1.350	300	700	211	250	31	100	3.760	4,8	2	195	301	304	419
1,5T458BC	1.500	725	470-1.450	300	700	211	250	31	100	3.760	4,8	2	195	315	311	426
2T458BC	2.400	675	430-1.350	340	850	270	250	31	170	4.810	6,1	2	203	348	275	541
2T458BC	2.000	800	460-1.600	340	850	270	250	31	170	4.810	6,1	2	203	361	297	579
2T458BC	1.750	915	510-1.830	340	850	270	250	31	170	4.810	6,1	2	203	365	322	602
2T458BC	2.400	675	430-1.350	340	850	272	250	32	170	4.810	6,1	3	203	361	271	550
2T458BC	2.000	800	460-1.600	340	850	272	250	32	170	4.810	6,1	3	203	373	293	589
2T458BC	1.750	915	510-1.830	340	850	272	250	32	170	4.810	6,1	3	203	376	317	612
3T458BC	3.200	675	450-1.350	340	850	338	250	34	170	5.590	7,1	3	207	245	426	669
3T458BC	2.800	800	500-1.600	340	850	338	250	34	170	5.590	7,1	3	207	269	437	713
3T458BC	2.500	915	650-1.830	340	850	338	250	34	170	5.590	7,1	3	207	292	434	752
4T458BC	4.200	675	480-1.350	420	1.000	384	300	41	160	8.800	10,3	3	268	311	475	1.035
4T458BC	3.500	800	570-1.600	420	1.000	384	300	41	160	8.800	10,3	3	268	328	480	1.058
4T458BC	3.400	915	670-1.830	420	1.000	384	300	41	160	8.800	10,3	3	268	353	479	1.124
4T458BC	4.200	675	480-1.350	420	1.000	350	300	43	160	8.800	10,3	4	266	305	457	1.053
4T458BC	3.500	800	570-1.600	420	1.000	350	300	43	160	8.800	10,3	4	266	322	462	1.077
4T458BC	3.400	915	670-1.830	420	1.000	350	300	43	160	8.800	10,3	4	266	346	462	1.143
5T458BC	3.900	1.000	810-2.000	420	1.000	350	300	46	160	10.560	12,9	4	318	406	439	1.261

Model																
6T458BC	4.600	1.100	940-2.200	420	1.000	350	300	45	160	17.590	20,7	4	318	408	446	1.471



Qualities:

- Very good visibility conditions
- Favorable lost load and weight
- Solid, slender arm construction
- Different contact pad coatings available
- Rotation 360° endlessly
- Limitation on rotation 180° optionally
- Service friendly



- Optional: contact pad coatings (standard polyurethane coating Poly-1).
- Capacity related to max. roll diameter.
- For taking up horizontal rolls, 5-degree mast forward tilt is required.
- Optional: restricted to 180° rotation, continuous contact pads.
- Pressure plate coverings see under accessories.
- Attachment with sideshift Model T498BC (add-on price).

Product Images

