


Triple Sideshifter T253B

2 hydraulik functions ¹⁾

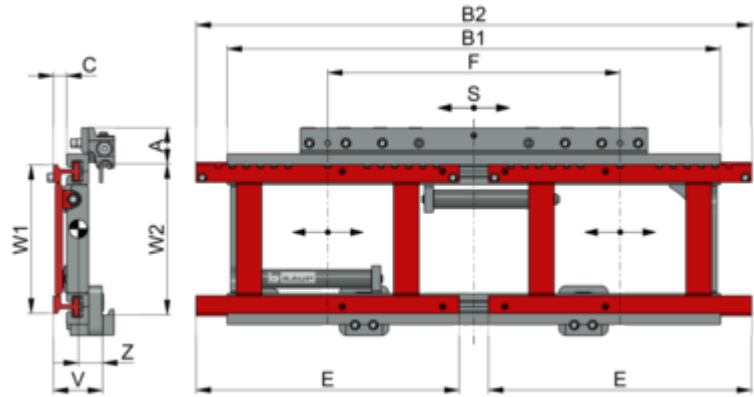

Specification:

The Triple Sideshifter T253B is a part of the KAUP Multiple Sideshifter product range. This attachment extends the operation of every forklift truck as the Triple Sideshifter can simultaneously pick up two transport units next to each other.



Attachment is operated hydraulically, i.e. supplied with oil from the forklift truck's hydraulic system. Truck requires two additional hydraulic functions.



Attachment supplied serially without forks. All forks in accordance with ISO 2330 can be used. Matching forks model T180 are available.



Attachment can be fitted with load backrest model T179.



Please note the additional information below the data table.



Triple Sideshifter T253B

Technical specifications

Model															
2T253B-L	1.250	600	2	2	98	1.520	720	800-1.200	±100	138	66	234	191	1.350	36
2T253B-L/Q	1.250	600	2	2	98	1.600	800	800-1.440	±100	138	67	231	207	1.550	36
3T253B-L	1.750	600	2	3	85	1.520	720	800-1.200	±100	138	64	255	223	1.350	36
3T253B-L/Q	1.750	600	2	3	85	1.600	800	800-1.440	±100	138	66	252	241	1.550	36
4,5T253B-L	2.000	600	2	3	85	1.520	720	800-1.200	±100	148	66	262	277	1.350	36
4,5T253B-L/Q	2.000	600	2	3	85	1.600	800	800-1.440	±100	148	67	258	299	1.550	36
4,5T253B-Q	2.000	600	2	3	85	1.960	980	980-1.540	±100	148	69	255	317	1.650	36
5T253B-L	2.750	600	3	4	118	1.520	720	800-1.200	±100	153	74	319	352	1.460	40
5T253B-L/Q	2.750	600	3	4	118	1.600	800	800-1.440	±100	153	75	317	368	1.550	40
6T253B-L	2.000	1.200	4	4	135	1.520	720	800-1.200	±160	178	81	366	431	1.460	56
6T253B-L/Q	2.000	1.200	4	4	135	1.600	800	800-1.440	±160	178	82	363	457	1.600	56



Qualities:

- Very good residual capacity
- Good visibility conditions
- SMOOTHROLL- bottom hooks with compact rollers serially
- Optional: single or pairwise control of fork pairs



- L = Pallet handling lengthwise / Q = Pallet handling crosswise. / L / Q = Pallet handling lengthwise and crosswise.
- 1) Alternatively available with solenoid valve for individual adjustment of the fork carriages.
- Forks see model T180.
- Please observe necessary fork shank under-clearance.
- Capacities of 3T upwards with SOFTSTOP end-of-stroke slow-down.
- Higher capacities and other construction widths available upon request.
- Load Backrest see model T179.

Product Images

