


## Rotator 360° endless, fishing industry T351.1S / T351.1.3S

1 hydraulic function

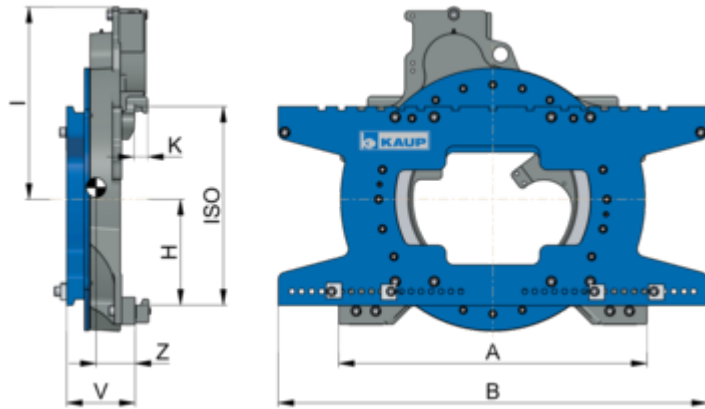

### Specification:

Beside the foundry implementation the KAUP Rotator 360° endless T351 is also available in two fishing implementation. These attachments are adapted to the demands of this operational area with special sea-water resistant paint, galvanised screws, flanges and fork carriages (according to implementation) as well as with silicone to close drillings and drill holes sealed. But also for tannings this device is suitable.



Attachment rotates hydraulically by 360° endless in both directions.



Attachment is serially manufactured for the fishing industry and is available in two versions T351.1S and T351.1.3S. Further Information are displayed in a glossary in the info-center.



Attachment is serially designed without sideshift. It can be fitted with separate or valveblock sidesift upon request.



Attachment is operated hydraulically, i.e. supplied with oil from the forklift truck's hydraulic system. Truck requires one additional hydraulic function.



Attachment supplied serially without forks. All forks in accordance with ISO 2330 can be used. Matching forks model T180 are available.



# Rotator 360° endless, fishing industry T351.1S / T351.1.3S

## Technical specifications

Model													
1T351.1S	1.800	500	560	890	213	478	33	2	6.013	7,6	155	83	180
2T351.1S	2.500	500	790	1.040	269	515	29	2	7.700	9,7	166	90	225
2,5T351.1S	3.200	500	790	1.100	269	515	33	3	7.700	9,7	177	98	290
1T351.1.3S	1.800	500	560	890	213	478	33	2	6.013	7,6	155	83	180
2T351.1.3S	2.500	500	790	1.040	269	515	29	2	7.700	9,7	166	90	225
2,5T351.1.3S	3.200	500	790	1.100	269	515	33	3	7.700	9,7	177	98	290



### Qualities:

- Fishing implementation
- Good visibility conditions
- Good residual capacity
- Rotation 360° endlessly
- Robust construction with gear drive
- Original forks usable
- Lateral supporting fork and load stabilizers optionally



- Rotators with higher rotating speeds available upon request
- Other fork carriage widths available upon request.
- Removable lateral supporting fork 800 mm available against add-on price
- Removable and foldable lateral supporting fork 800 mm available against add-on price
- Downhold T167 to empty metal grid boxes etc on request
- Matching forks for KAUP-Rotators on request.
- When forks are used in combination with a Rotator extremely high strain is applied to the lower fork angle when rotating a load which in turn strains the lower brackets.
- For this type of operation KAUP recommends forks with strengthened lower brackets. Strengthened lower brackets can be ordered for all ISO forks model T180.

### Product Images

