


Sideshifter with increased sideshift stroke T151P-C



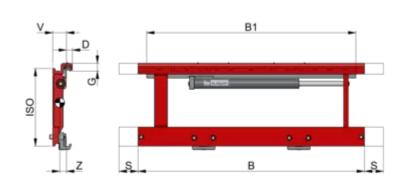

Specification:

The KAUP Container Sideshifter T151P-C simplifies loading and unloading of containers. This attachment with increased sideshift stroke makes it possible to reach beyond the chassis width of the forklift truck and place loads close to the container wall.



Attachment is operated hydraulically, i.e. supplied with oil from the forklift truck's hydraulic system. Truck requires one additional hydraulic function.



Attachment can be fitted with load backrest model T179.



Attachment is available for operation in explosion hazardous areas.



Attachment supplied serially without forks. All forks in accordance with ISO 2330 can be used. Matching forks model T180 are available.



Sideshifter with increased sideshift stroke T151P-C

Technical specifications

Model											
2T151P4N-C	2.500	500	780	800	±160	33	33	2	55	21	55
2T151P-C	2.500	500	780	1.020	±225	33	40	2	72	34	57
2T151P-C	2.500	500	1.060	1.020	±225	33	40	2	72	35	68
2T151P-C	2.500	500	1.150	1.020	±225	33	40	2	72	35	73
4T151P-C	5.000	500	780	1.100	±250	40	49	3	82	36	90
4T151P-C	5.000	500	1.200	1.100	±250	40	49	3	82	38	117
4T151P-C	5.000	500	1.600	1.100	±250	40	49	3	82	40	143
6T151P-C	8.000	600	1.800	1.100	±250	50	66	4	107	55	301



Sideshifter with increased sideshift stroke T151P-C



Qualities:

- Optimal utilisation for container loading
- Ideal for confined spaces



- 1) Differing shift strokes available upon request.
- Higher capacities and other construction widths available upon request.
- Load Backrest see model T179.
- 2T151P4N-C with EASYSLIDE greasable sliding pads
- Bottom brackets with roller guidance (SMOOTHROLL).
- Optional in explosion proof version

Product Images









