


Six Pallet Handler T429-4-6



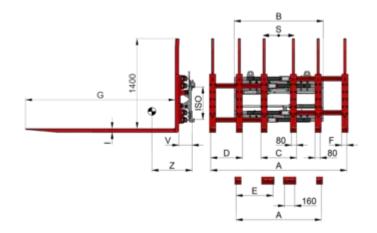

Specification:

The KAUP Sixfold Pallet Handler T429-4-6 can transport up to six pallets at the same time and makes speedy loading of lorries or wagons from the side possible as well as loading and unloading double deep storage racks. The innovative visibility improved design makes this attachment the lightest in its class with comparable capacity. T-profiles and C-profiles ensure highest stability and long operating hours with extended intervals between servicing and a minimum of required maintenance even in heavy duty operation.



Multi Pallet Handling: For 4 or 6 pallets for pallet pick-up lengthwise 800 x 1.200 mm.



Attachment has separate sideshift as standard. The maximum allowable sideshift stroke (e.g. \pm 100 mm) is always available independent of fork or arm position (with clamps or fork positioners).



Attachment is operated hydraulically, i.e. supplied with oil from the forklift truck's hydraulic system. Truck requires two additional hydraulic functions.



Please note the additional information below the data table.



Six Pallet Handler T429-4-6

Technical specifications

Model															
4T429-4-6	2.500	1.200	±125	1.340-2.140	1.400	560	500	580	80	60	2.350	3	212	635	1.250
4T429-4-6	2.500	1.200	±125	1.340-2.140	1.400	560	500	580	80	60	2.350	4	212	635	1.250
6T429-4-6	4.000	1.200	±160	1.340-2.290	1.790	560	500	580	90	70	2.350	4	192	615	1.435
6T429-4-6	4.000	1.200	±160	1.340-2.740	2.260	560	500	580	90	70	2.350	4	192	605	1.470
10T429-4-6	6.000	1.200	±160	1.340-2.290	1.790	560	500	580	110	70	2.350	4	207	600	1.680
10T429-4-6	6.000	1.200	±160	1.340-2.740	2.260	560	500	580	110	70	2.350	4	207	585	1.720
10T429-4-6	6.000	1.200	±160	1.360-2.840	2.260	560	480	560	110	70	2.350	4	207	585	1.720



Six Pallet Handler T429-4-6



Qualities:

- Six Pallet Handler for heavy duty tasks
- Excellent residual capacity lightest attachment in this class
- Very good visibility conditions
 Synchronized for quicker working speeds
 Independent sideshift serially
- Screw-on forks serially



- 6T and above available with ± 250 mm extended sideshift on request
- Six Pallet Handler with Load Stabilizer available upon
- Six Pallet Handler in integrated version available upon request.

Product Images







