


## Block Clamp T412V

with independent sideshift – 2 hydraulic functions

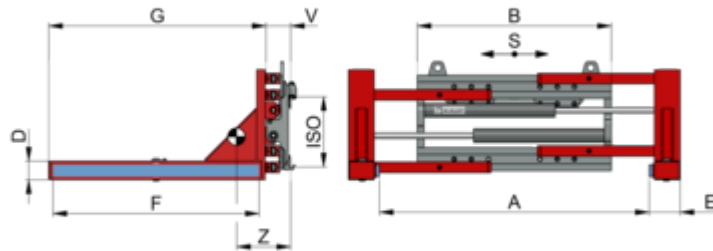

### Specification:

KAUP Block Clamps T412V are best suited to pick up packets of upright format blocks with plane surfaces such as hollow, lime sand and concrete blocks as well as curb stones with high dimensional stability. The arms have a central swinging support to uniformly distribute the pressure and have flexible Vulcollan bars to compensate variations in dimensions of the load.



Attachment has separate sideshift as standard. The maximum allowable sideshift stroke (e.g.  $\pm 100$  mm) is always available independent of fork or arm position (with clamps or fork positioners).



Attachment is operated hydraulically, i.e. supplied with oil from the forklift truck's hydraulic system. Truck requires two additional hydraulic functions.



Attachment can be fitted with load backrest model T479. The load backrest model T479.1 is suitable for fork positioners T160B and T466B up to 4.8T.



Attachment is available with cylinder and sideshifter protection.



Attachment is designed with toe-in on the tips which should be taken into account when choosing the opening range.



## Block Clamp T412V

### Technical specifications

Model													
1,5T412V	1.250	500	±100	220-1.400	970	110	180	1.200	1.265	2	133	335	420
2T412V	2.000	500	±100	270-1.570	1.130	110	180	1.200	1.265	2	143	314	475
2T412V	2.000	500	±100	270-1.570	1.130	110	180	1.200	1.265	3	143	314	475
3T412V	2.500	500	±100	270-1.570	1.130	110	180	1.200	1.265	3	152	289	546
3T412V	2.500	500	±100	270-1.900	1.460	110	180	1.200	1.265	3	152	277	577
4,5T412V	3.200	600	±100	290-1.790	1.330	110	180	1.200	1.265	3	188	266	702
4,5T412V	3.200	600	±100	290-1.920	1.460	110	180	1.200	1.265	3	188	262	722
5T412V	3.500	600	±160	230-1.860	1.550	110	180	1.200	1.265	4	176	219	825



## Qualities:

- Low lost load centre - excellent residual capacity
- Very good visibility conditions
- Independent sideshift serially
- Load Backrest optionally



- Also available without sideshift, model T402V
- Variations in arm dimensions upon request.
- Load Backrest see model T179.

## Product Images

