


Crane Jib T183, T183TM, T183TH¹⁾



Specification:

Different versions of this range of KAUP Crane Jibs are mounted directly onto the fork carriage. Combination with other attachments or with standard forks is, depending on the handling task, easily possible. The manually swivelling crane column (180° to the right and left) further extends the application possibilities of this attachment. Depending on the version chosen, the crane hook can be either adjusted mechanically (T183), the telescopic boom extended mechanically (T183TM) or hydraulically (T183TH).

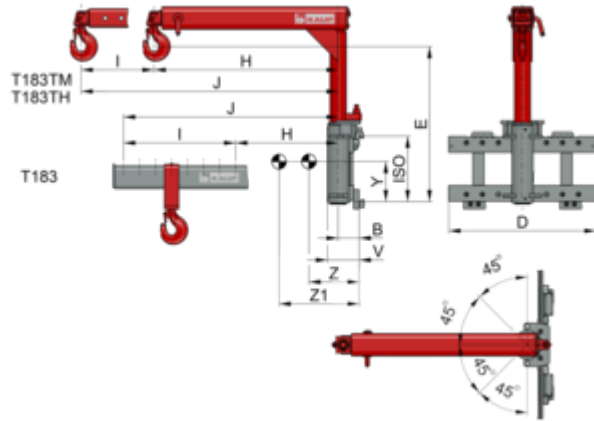

Please note the additional information below the data table.



Crane Jib T183, T183TM, T183TH¹⁾

Technical specifications

Model												
1T183	1.500	500	125	920	500-1.200	7x100	945	2	186	271	--	201
2T183	2.500	500	132	920	500-1.200	7x100	915	2	198	320	--	230
2T183	2.500	500	142	920	500-1.200	7x100	1.015	3	208	296	--	259
3T183	4.000	500	155	1.150	500-1.200	7x100	1.155	3	234	258	--	356
5T183	6.000	600	187	1.220	600-1.200	4x150	950	4	284	270	--	553
2T183TM	1.470	1.200	132	920	1.150-1.950	8x100	1.065	2	198	314	--	251
2T183TM	1.470	1.200	142	920	1.150-1.950	8x100	1.165	3	208	294	407	279
3T183TM	2.350	1.200	155	1.150	1.190-1.990	8x100	1.160	3	234	295	402	404
5T183TM	3.650	1.350	187	1.220	1.350-2.150	8x100	970	4	284	346	471	636
2T183TH	1.410	1.250	132	920	1.250-2.050	-	1.065	2	198	360	535	272
2T183TH	1.410	1.250	142	920	1.250-2.050	-	1.165	3	208	338	470	301
3T183TH	2.480	1.135	155	1.150	1.135-1.945	-	1.170	3	234	327	417	427
5T183TH	3.880	1.270	187	1.220	1.270-2.080	-	970	4	284	368	483	668



Qualities:

- Solid construction
- Good visibility conditions
- Simple assembly
- Original forklift truck forks can be used
- Combination with other attachments possible



- 1) T183 = hydraulic swivel $\pm 45^\circ$ - hook manually adjustable
- T183TM = mechanical swivel $\pm 90^\circ$ and mech. telescope
- T183TH = mechanical swivel $\pm 90^\circ$ and hydraulic telescope - 1 hydraulic function
- Higher capacities available upon request.

Product Images